



## “YACHT” BILGE PUMPS

The bilge pumps of the series “YACHT” are entirely manufactured in special crash, rust and hydrocarbons proof polypropylene. Very easy to be cleaned and installed, this pump is supplied with 1 meter cable, fastening bottom cover and instruction manual for correct use.

### APPLICATIONS

Best uses in emptying small tanks and bilges of boats, can be used also in small emergency systems.

### TECHNICAL FEATURES


- Pump body and impeller: SUPLEN V 30
- Pump shaft and screws: stainless steel AISI 316
- Seal: lip seal NBR

Liquid test temperature according to CEI EN 60034-1 p15.2.4 & 60335-1 p11 Performances limits ISO 9906 ANNEX A

Applied test standards:

EN 60335-1 1994 +++; EN 60335-2-41

### PKS YACHT ...

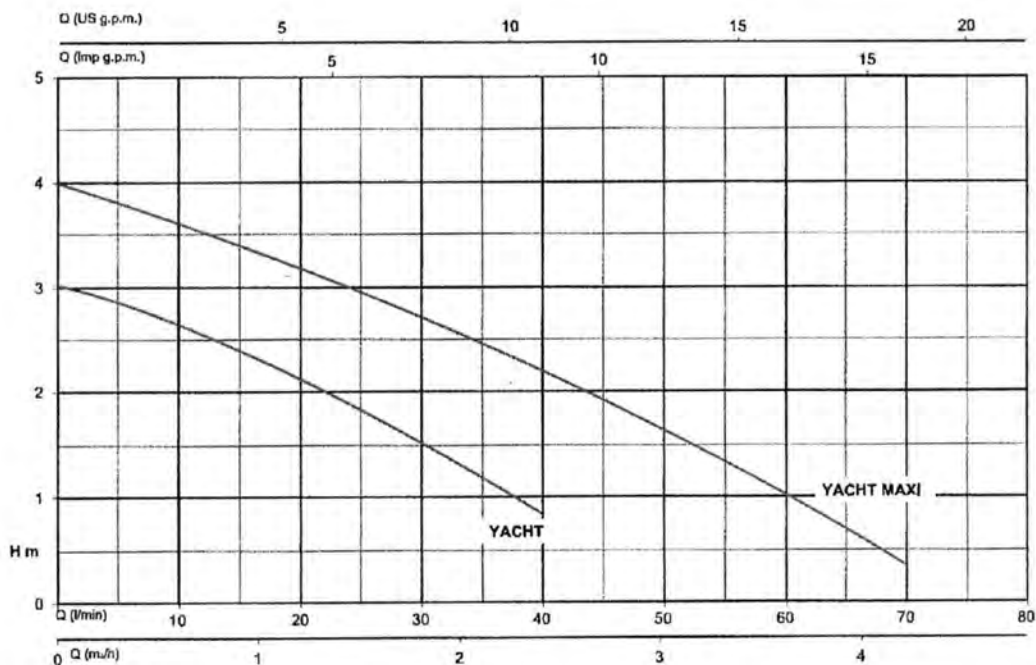

CODE	Volt	Input power	R.P.M.	Input current	Capacity								
					Q [m³/h]	0	0.6	1.2	1.8	2.4	3	3.6	4.2
					Q [l/t]	0	10	20	30	40	50	60	70
	[V]	[W]	[min-1]	[A]	Total head (m C.A.)								
PKS YACHT 065 12	12	65	4200	4.2	H [m]	3	2.65	2.15	1.5	0.85			
PKS YACHT 065 24	24	65	4200	2.6	H [m]	3	2.65	2.15	1.5	0.85			
PKS YACHT 100 12	12	100	4200	6	H [m]	4	3.6	3.1	2.75	2.1	1.8	1	0.3
PKS YACHT 100 24	24	100	4200	3.5	H [m]	4	3.6	3.1	2.75	2.1	1.8	1	0.3