



DB DIVERTRON X ... lateral suction
DB DIVERTRON ...

Submersible multistage electronic pumps

APPLICATIONS

- Pressurization, gardening and irrigation in residential building service



MATERIALS


External jacket	Technopolymer
Impellers	Technopolymer / AISI 304
Motor shaft	AISI 416
Diffuser	Technopolymer
Handle	Technopolymer

TECHNICAL FEATURES

Max. Head	44,5m
Max. Flow	6m ³ /h
Max. liquid temperature	40°C
Discharge head	1"
Max. depth immersion	12m
Insulation class	F
Poles	2
Protection degree	IP68
Voltage	230V (1ph)

MOTOR

Accessories pag. 61

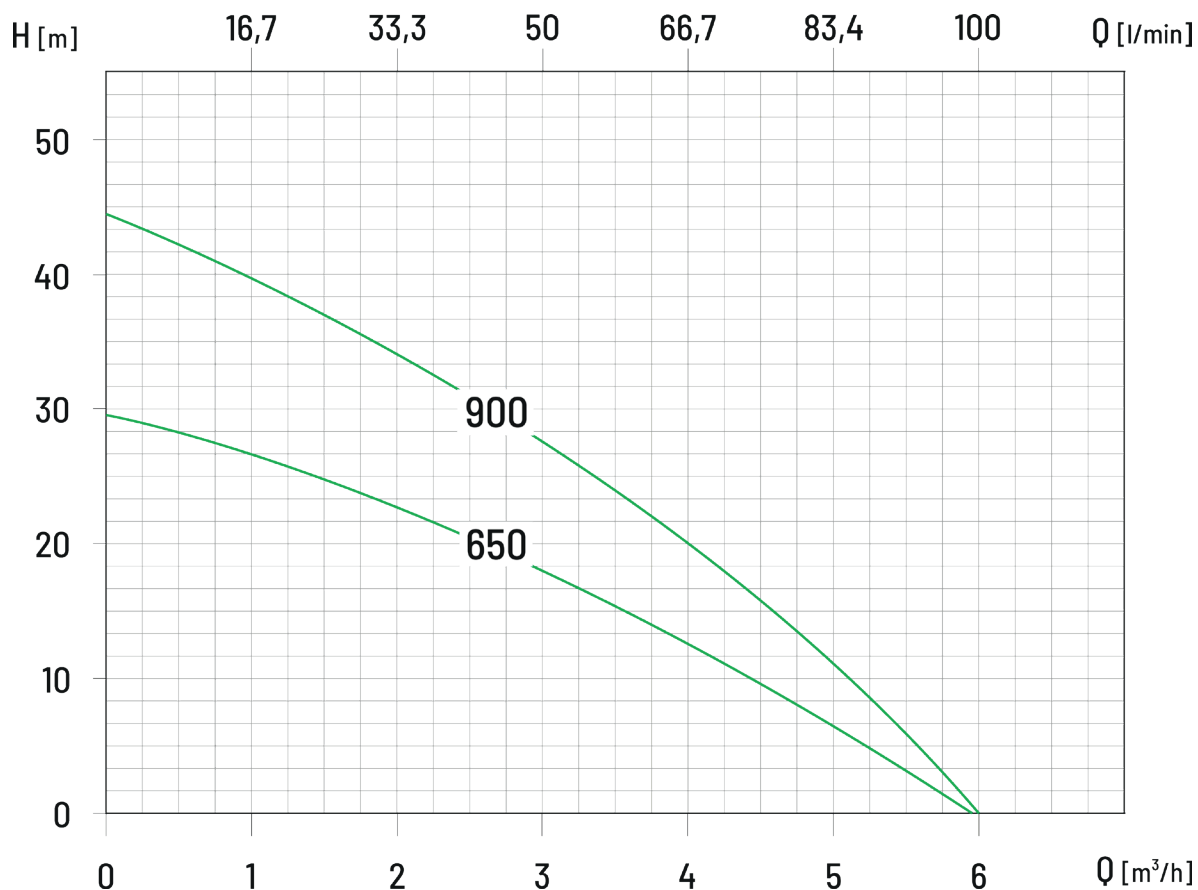

CODE	MOTOR				Q							
	kW	HP	I _n [A]	μF	l/min 0	20	30	40	50	60	70	80
DB DIVERTRON 650 (A)*	0,42	0,56	2,9	8	29,6	26,8	24,7	22,2	19,8	16,4	12,5	8,2
DB DIVERTRON 900 (A)*	0,56	0,75	4,2	12,5	44,5	40,9	37,8	34,1	30,2	25,3	19,8	13,6
▶ DB DIVERTRON X 650	0,42	0,56	2,9	8	29,6	26,8	24,7	22,2	19,8	16,4	12,5	8,2
▶ DB DIVERTRON X 900	0,56	0,75	4,2	12,5	44,5	40,9	37,8	34,1	30,2	25,3	19,8	13,6

▶ WITH LATERAL SUCTION

* FLOAT VERSION