



Electronic submersible multistage pumps

APPLICATIONS

- Use in wells and tanks
- Pressurization
- Rainwater reuse
- Gardening and irrigation activities

MATERIALS

External jacket	Technopolymer
Impellers	Technopolymer / AISI 304
Motor shaft	AISI 303
Diffuser	Technopolymer




TECHNICAL FEATURES

Max. Head	45m
Max. Flow	7,5m³/h
Max. liquid temperature	50°C
Discharge head	1" 1/4
Max. depth immersion	15m
Insulation class	F
Poles	2
Protection degree	IP68
Voltage	230V (1ph)



Integrated 0,04 liter expansion tank

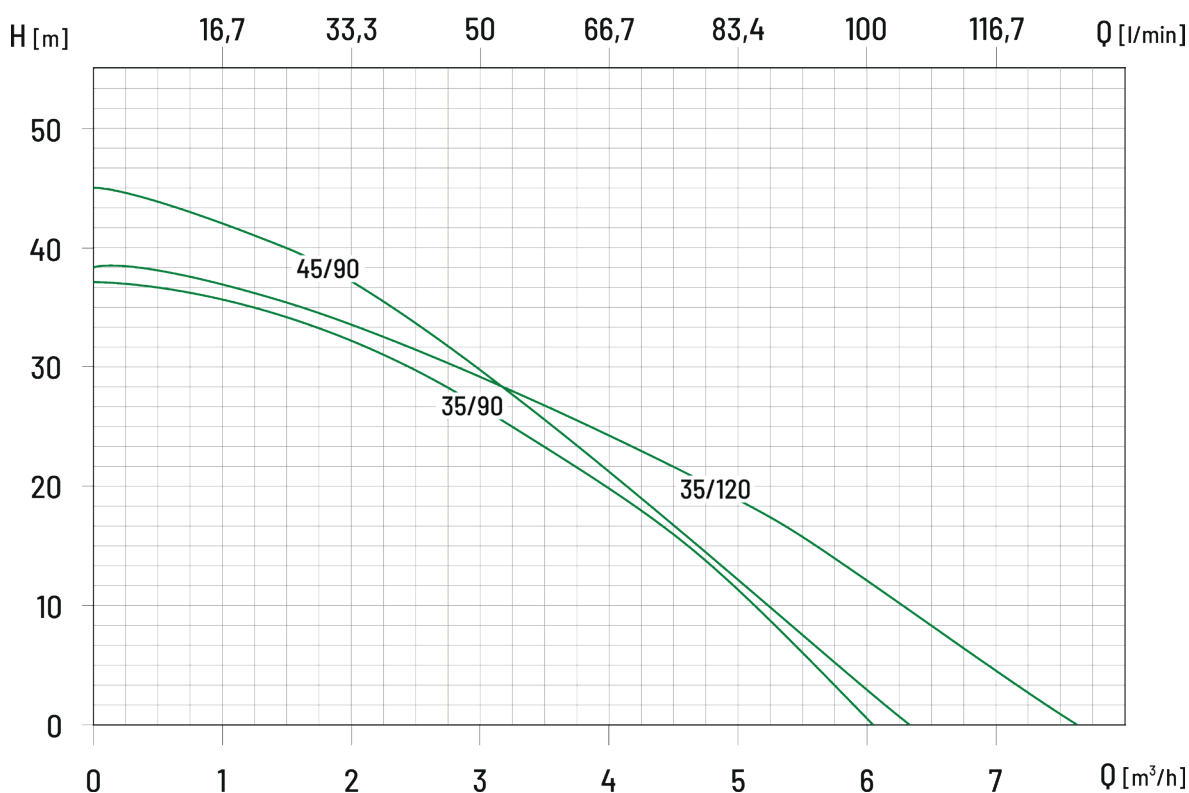

CODE	MOTOR			Q																
	kW	HP	In [A]	l/min 0	11	20	30	40	50	60	70	80	90	100	105	110	122	125		
				m³/h 0	0,7	1,2	1,8	2,4	3	3,6	4,2	4,8	5,4	6	6,3	6,6	7,3	7,5		
DB DTRON2 35/90	0,52	0,7	3,4	37	35,9	35	33	30	26,7	22,7	18,5	13,4	7,6	0,6						
DB DTRON2 45/90	0,6	0,8	4,2	45	43	41,2	38	34,2	29,7	24,7	20	15	9	2,5	0,6					
DB DTRON2 35/120	0,6	0,8	4	38	37,6	36,3	34	31,5	28,9	26	23,2	20	16,3	12	9,8	7,5	2,2	0,7		
▶ DB DTRON2 X 35/90	0,52	0,7	3,4	37	35,9	35	33	30	26,7	22,7	18,5	13,4	7,6	0,6						
▶ DB DTRON2 X 45/90	0,6	0,8	4,2	45	43	41,2	38	34,2	29,7	24,7	20	15	9	2,5	0,6					
▶ DB DTRON2 X 35/120	0,6	0,8	4	38	37,6	36,3	34	31,5	28,9	26	23,2	20	16,3	12	9,8	7,5	2,2	0,7		

▶ WITH LATERAL SUCTION (+1 m suction kit upon request)